


**CEMA Tiny CFL** comes with ultra thin T3 tubes with all the benefits of a standard compact fluorescent lamp. Suitable for use with new generation light fixtures.

### CEMA Endura T4

compact fluorescent lamps consume 75% less energy compared to standard GLS without losing on light quality.

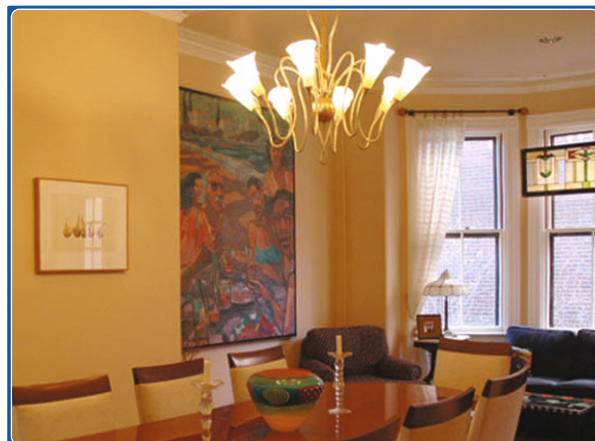

### Applications



TABLE FLOOR LAMP



OUTDOOR COVERED



RECESSED CANS (Open)



READING LAMP



PENDANT FIXTURE



WALL SCONCE



CEILING



CEILING FAN

| Product Description           | Color Temp | Initial Lumens | Tube Diameter | Diameter (in mm) | Length (in mm) |
|-------------------------------|------------|----------------|---------------|------------------|----------------|
| CEMA Tiny CFL T3 5W 2U B22    | 6500K      | 210            | 9             | 44               | 110            |
| CEMA Tiny CFL T3 8W 3U B22    | 6500K      | 400            | 9             | 44               | 111            |
| CEMA Tiny CFL T3 11W 3U B22   | 6500K      | 570            | 9             | 44               | 124            |
| CEMA Tiny CFL T3 15W 3U B22   | 6500K      | 850            | 9             | 44               | 140            |
| Product Description           | Color Temp | Initial Lumens | Tube Diameter | Diameter (in mm) | Length (in mm) |
| CEMA Endura CFL T4 11W 2U B22 | 6500K      | 570            | 12            | 48               | 150            |
| CEMA Endura CFL T4 15W 2U B22 | 6500K      | 850            | 12            | 48               | 170            |
| CEMA Endura CFL T4 20W 3U B22 | 6500K      | 1120           | 12            | 54               | 165            |
| CEMA Endura CFL T4 23W 3U B22 | 6500K      | 1290           | 12            | 54               | 175            |
| CEMA Endura CFL T4 28W 4U B22 | 6500K      | 1700           | 12            | 59               | 168            |
| CEMA Endura CFL T4 32W 4U B22 | 6500K      | 2000           | 12            | 59               | 177            |
| CEMA Endura CFL T4 36W 3U B22 | 6500K      | 2088           | 12            | 58               | 185            |

Note : Specifications & Dimensions are subject to change without prior notice